


PROVE™

PSE-IL

Vandal and Weather Resistant Keypad.

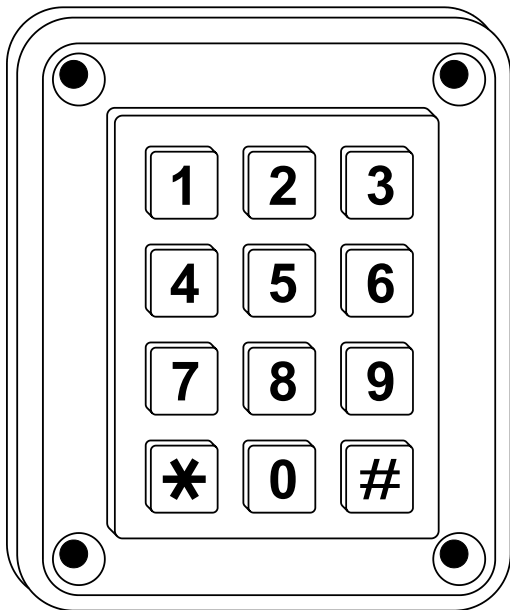

FEATURES

- Suitable for indoor/outdoor usage.
- Durable and attractive metal keypad construction (chromed Zamak).
- Vandal Resistant.
- Highly Weather Resistant.
- 12 or 24 Volt D.C. Backlighting.
- Compatible with all Presco controllers.
- Easily surface mounted using PSE-SMT.
- Two wire operation (third required for backlighting).
- Operating temperature range of 0°C to 70°C.
- 5 year manufacturer's warranty.

SPECIFICATIONS

Dimensions: 114mm Height x 95mm Width x 45mm Depth.

Weight: 550 grams.

Current: 0.25mA standby.
7mA operation.

Backlighting:

Voltage: 12V D.C. or 24V D.C.

Current: 35mA.

IMPORTANT: When using the PSE-IL in an area subject to static discharges the case of the PSE-IL should be connected to EARTH GROUND through one of the mounting screws to protect against damage, a lead is supplied for this purpose.

OPERATION

The PSE-IL can be used to perform all the functions of a standard Prove PSK2 keypad. The only difference in operation is the use of the **#** key instead of the **E** key.

The **#** key is a dual purpose key. When it is pressed as the first key in a code sequence it generates a #, when pressed as a subsequent key it then becomes the **E** key.

Should it be necessary to generate a # in the middle of a code sequence then you must press and hold the ***** key down, press the **#** key then release both keys.

Examples

Code sequences using a PSK2

1. ***** **1** **1** **2** **3** **4** **E**
2. **1** **2** **3** **4** **E**
3. **#** **1** **1** **2** **3** **4** **E**
4. **#** **1** **E**

Equivalent code sequences using the PSE-IL

1. ***** **1** **1** **2** **3** **4** **#**
2. **1** **2** **3** **4** **#**
3. **#** **1** **1** **2** **3** **4** **#**
4. **#** **1** **#**

+ Mounting Screw

Mounting Screw +

Backing Box Outline

18mm Ø + Cable Entry


+ Mounting Screw

Mounting Screw +

PSE-IL Mounting Template

IMPORTANT: When using the PSE-IL in an area subject to static discharges the case of the PSE-IL should be connected to EARTH GROUND through one of the mounting screws to protect against damage, a lead is supplied for this purpose.

PSE-IL WIRING DIAGRAM

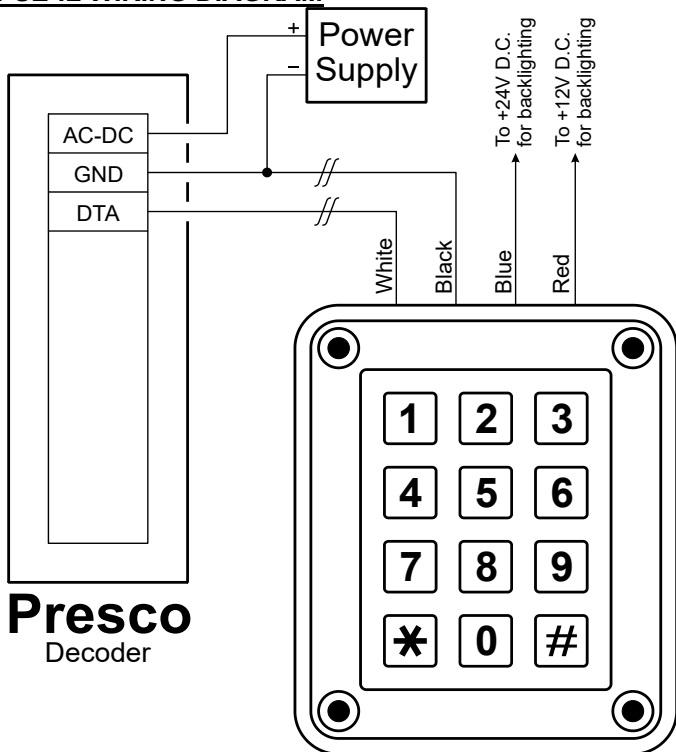

CONNECTIONS

Black wire = GND (Negative).

White wire = DTA (Data).

Blue or Yellow wire = +24V D.C. for backlighting.

Red wire = +12V D.C. for backlighting.

Note: Use either Blue/Yellow or Red wire for backlighting purposes **not both**.




WARRANTY

The manufacturer will replace or repair this product if proven to be faulty (excluding accidental or malicious damage) under the 5 year warranty offered from the date of purchase.

As NIDAC Pty Ltd or its agents do not perform the final installation, inspection or training in the use of this product, they cannot be held liable for injury, loss or damage directly or consequentially arising from the use or misuse of this product.


The software design of the NIDAC Prove is protected internationally. Design improvement and specification changes are subject to change without notice. All designs are copyright protected.

DIMENSIONS

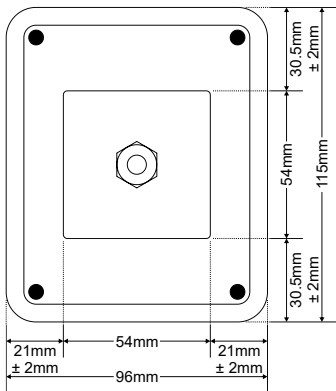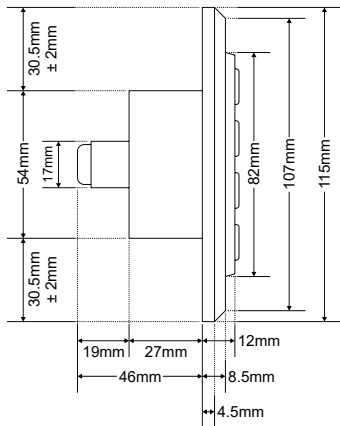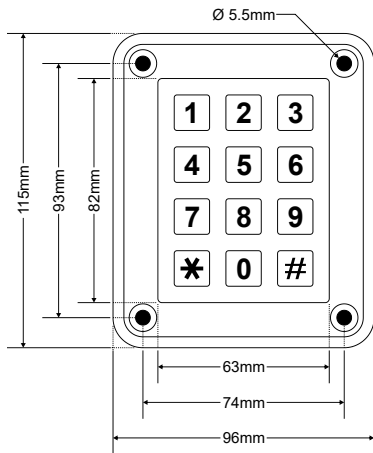

AVAILABLE ACCESSORY

PSE-SMT Surface mount box for PSE-IL keypad.

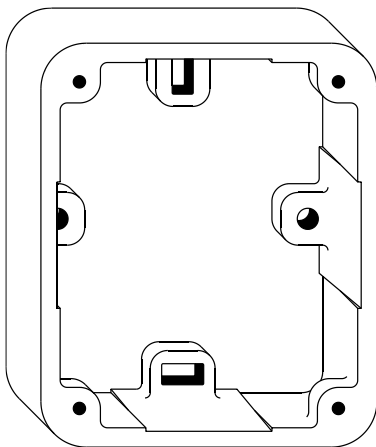

Designed and manufactured by

NIDAC Pty Ltd
2 Cromwell Street
Burwood Victoria
Australia 3125

+61 3 9808 6244
www.nidac.com
sales@nidac.com