


GT-RY

External Signaling Relay

The GT-RY external signaling relay provides a normally open dry contact closure during call-in. It also provides a contact to turn on external light at the entrance station when calling the tenant station.

The connector provided with tenant station is required when using the GT-RY.

The relay is compatible with all GT Series tenant stations and the IXG-2C7 tenant station, a component of the IX|IXG Series.

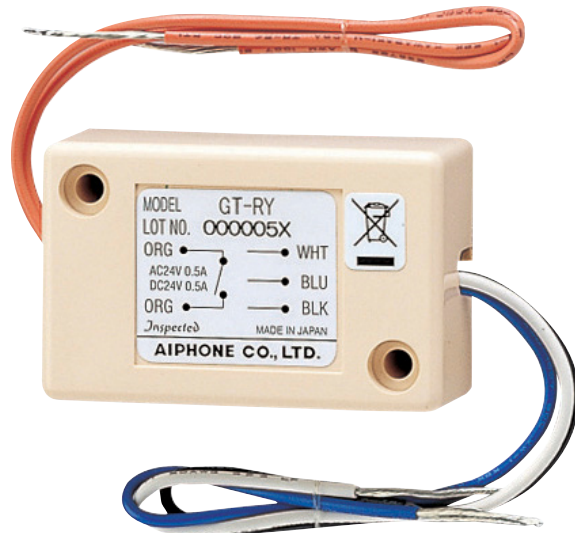

- **N/O contact output**
- **Provides relay for entrance light control or an additional buzzer at residence**

Power Source 24V DC—supplied by intercom station

Contact Rating 24V AC/DC, 500mA

Dimensions 1 3/8" H 2 3/16" W 7/8" D