


RY-ES

External Signaling Relay

The RY-ES is an external signaling relay for the AX, DB, JO, JP, JV, KB, and NIM Series intercom systems.

When the interior intercom is called, a doorbell, buzzer, or signaling device is triggered and remains on while the door station call button is activated.

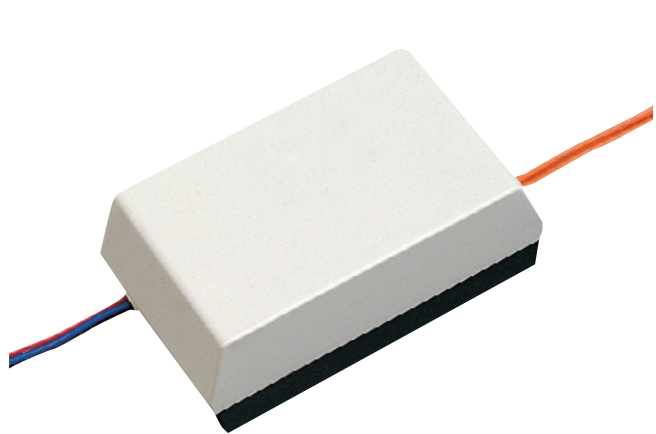

- **Triggers an external device when the intercom is called**
- **External device remains on during chime at connected station**

Power Source 12–24V DC, 12–16V AC—
supplied by answering station

Contact Rating 125V AC, 1.0A 30V DC, 1.0A

Dimensions	4 1/8 in H	2 7/16 in W	1 5/8 in D
	104 mm H	62 mm W	41 mm D