


▼ Key Switches & Locks

Key Switches

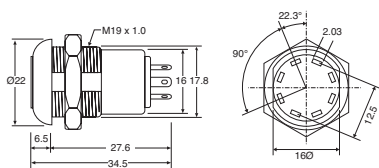

Panel hole 19mm. 33.6mm overall depth. 61mm depth with key inserted, including terminals. Two keys supplied. Rated 2A @ 250V AC, 4A @ 125V AC, 4A @ 28V DC. 003 key models can only be ordered by OEM customers. MOQ applies.

Part No. / Key	Configuration	Poles	Pos 1	Pos 2	Pos 3	Pos 4	Key Removable
S 2600 Random S 2604 606 Key S 2605 003 Key		DP	8-1, 4-5	1-3, 5-7	-	-	Pos. 1
S 2601 Random S 2603 606 Key		DP	8-1, 4-5	1-2, 5-6	-	-	Pos. 1
S 2612 003 S 2614 606		DP	8-1, 4-5	1-3, 5-7	-	-	Pos. 1 & 2
S 2622 003 S 2624 606		DP	8-1, 4-5	1-2, 5-6	7-8, 3-4	-	Pos. 1
S 2625 003		DP	8-1, 4-5	1-2, 5-6	2-3, 6-7	-	Pos. 1
S 2632 606		DP	8-1, 4-5	1-2, 5-6	7-8, 3-4	-	Pos. 1, 2 & 3
S 2654 606		DP	8-1	1-2	2-3	3-4	Pos. 1, 2, 3 & 4.

▲ Momentary ● Removeable ● Trapped

Two Pole Two Position

Price Each	RRP	4+	10+
Key removable in one position only.			
\$ 2600 Random keyed	16.50	14.95	13.25
\$ 2601 Random keyed	24.95	22.50	19.95
\$ 2603 Common keyed (606 key)	23.45	21.10	18.75
\$ 2604 Common keyed (606 key)	17.50	15.75	14.00
\$ 2605 Common keyed (003 key)	OEM ONLY		
Key removable in all positions			
\$ 2612 Common keyed (003 key)	OEM ONLY		
\$ 2614 Common keyed (606 key)	16.95	15.50	13.75
\$ 2513 Blank key to suit S 2600 - S 2632	2.35	2.10	1.90

Two Pole Three Position


Price Each	RRP	4+	10+
Key removable in one position only			
S 2622 Common keyed (003 key)		OEM ONLY	
S 2624 Common keyed (606 key)	17.00	15.30	13.60
S 2625 Common keyed (003 key)		OEM ONLY	
Key removable in all positions.			
S 2632 Common keyed (606 key)	17.00	15.30	13.60
S 2513 Blank key to suit S 2600 - S 2632	2.35	2.10	1.90

Two Pole Four Position

Price Each	RRP	4+	10+
Key removable in all positions.			
S 2654 Common keyed (606 key)	34.50	30.95	27.75
S 2513 Blank key to suit S 2600 - S 2632	2.35	2.10	1.90

2 Position 1NO1NC Heavy Duty Keyswitch

Switch type: 1NO1NC
Action: Latching (Alternate)
Switching rating: 500V 10A
Contact resistance: <50mΩ
Insulation resistance: >100MΩ (500V DC)
Mechanical life: >500,000 cycles
Electrical life: >50,000 cycles
Max panel thickness: 5mm
Panel cutout: Ø22mm

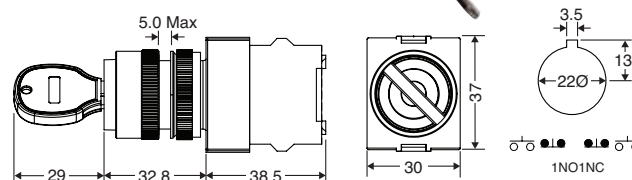

Price Each

RRP

10+

25+

S 0825

19.95

18.50

17.50

SS0825 2 spare keys to suit

8.00

8.00

8.00

S 0830 Box to suit (85 x 75 x 75mm)

19.95

18.50

17.50


S 0831 Box to suit 2 x switches (150 x 85 x 75mm)

29.95

27.50


26.00

Tubular Key Switches

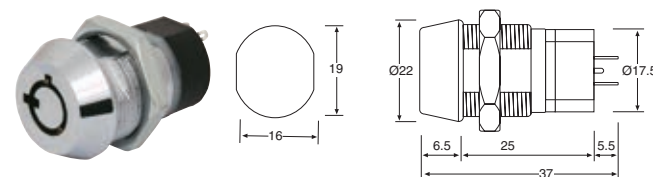

S 2515 - S 2516

Standard. DPST. Radial type tumbler mechanism. Silver plated contacts and terminals. Rated at 2A @ 250V AC. Key removable in both positions. Supplied with two keys. Overall depth with key inserted 69mm, including terminals.

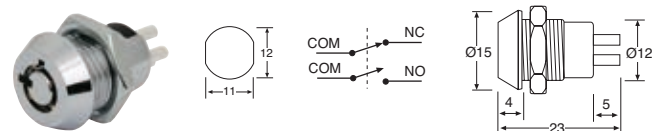

S 2520

Mini. SPDT. Radial type tumbler mechanism. Silver plated contacts and terminals. Rated at 0.5A @ 240V AC. Key removable in both positions. Supplied with two keys. Overall depth with key inserted 49mm, including terminals. 4 terminals, two sets of changeover contacts.

Price Each

RRP

4+

10+

S 2515 Standard

14.95

13.50

11.95

S 2520 DPST Mini

9.25

8.55

7.75

S 2521 DPST 1001 keyed mini

15.80

14.25

12.65


S 2518 Blank key to suit S 2515

3.55

3.25

2.90

Two Position Key Switch

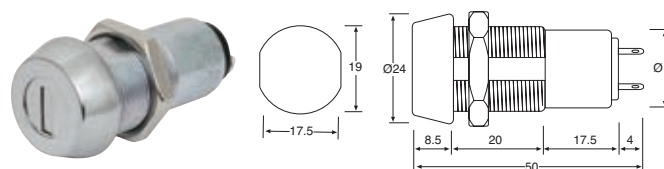

Rated at 3A @ 250V AC. Key removable in both positions. Includes two keys. Overall depth with key inserted 77mm, including terminals.



Price Each

RRP

4+

10+

S 2500 SPST type

17.95

14.95

12.80

S 2512 Blank key to suit

2.00

1.85

1.70